CONTROL

FRESH

EFFECTIVENESS





Catering for every taste The Easymount range allows you to laminate a whole range of jobs you previously had to outsource. So you can laminate shop signs, exhibition stands, roll-up banners and vehicle wraps – you can even mount on Foamex board up to 30mm/1-inch thickness – in-house with ease.



Premium Brand Laminating Supplies

BOSS pressure sensitive films

Roll Width	Roll Length	Mount	Gloss	Gloss (Anti-UV) Crystal Matt Ci	rystal Matt (Anti-UV) Flat Matt S	emi-Matt (lustr	e) Sandtex	Anti-Graffiti A	Anti-Graffiti (Anti-UV)
650mm/26-inches	50m/164ft	•	•	•	•	•	-	•	-	-	-
650mm/26-inches	100m/328ft	-	-	-	-	-	-	•	-	-	-
880mm/35-inches	50m/164ft	•	-	-	-	-	-	-	-	-	-
880mm/35-inches	100m/328ft	-	•	-	•	-	•	•	•	-	-
1040mm/41-inches	50m/164ft	-	-	•	-	•	-	•	•	-	-
1040mm/41-inches	100m/328ft	•	•	-	•	-	•	•	-	-	-
1300mm/51-inches	50m/164ft	•	-	-	-	-	-	-	•	-	-
1300mm/51-inches	100m/328ft	-	•	-	•	-	•	•	-	•	•
1370mm/54-inches	50m/164ft	-	•	•	•	•	•	•	-	-	-
1370mm/54-inches	100m/328ft	-	-	-	-	-	-	-	-	-	•
1520mm/60-inches	50m/164ft	-	•	-	•	-	•	•	-	•	-
1530mm/60-inches	50m/164ft	•	-	-	-	-	-	-	•	•	•

Yes - No S Special order Non-exhaustive list. Consult us for full stock and availability

lity you need to get the job completed.



EASYMOUNT AIR -Award-Winning Wide Format Laminator in the U.S.

The patented technology within the Easymount Air uses one of the most advanced concepts ever seen in a wide format laminator.



The pneumatic air allows the roller to float down; ensuring foam and soft fluted boards are not crushed. When the rollers achieve the correct board thickness, they can be locked in place to keep the required gap, making board feeding simple & guick.

Ideal for Sign makers and Print finishers for laminating posters, graphics and signs, mounting prints to boards and applying vinyls, tapes and adhesive films.





EASYMOUNT WIDE FORMAT SYSTEMS





LINEA ENCAPSULATION SYSTEMS


PEAK POUCH LAMINATING SYSTEMS

design and manufacture a wide range of laminating systems, specialising in function, style and reliability. For years, we have been leading the field with our innovative product development, successfully building our brands and customer relationships that help us to introduce unique products in the marketplace.

So if you're looking to improve your finishing, start by calling us.

🔺 EM-A1600SH





Film Finishes

Gloss / Gloss Anti-UV Crystal Matt / Crystal Matt Anti-UV

Flat Matt Semi-Matt (lustre) Sandtex

Anti-Graffiti / Anti-Graffiti Anti-UV

• 3" core 50m/164ft & 100m/328ft rolls






BOSS

BOSS FILM SUPPLIES



TRIMFAST TRIMMING & CUTTING SYSTEMS

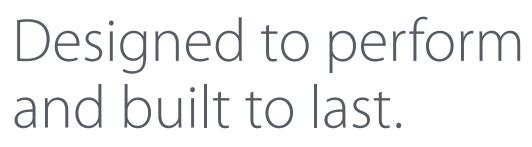

EASYMOUNT® AWARD-WINNING WIDE FORMAT SYSTEMS















Pop-Up & Exhibition Graphics



RELIABILITY	DESIGN	QUALITY
SPEED		INNOVATION
	EASE	SUPPORT

Easymount laminators are designed to perform and built to last.

Their advanced features allow you to laminate, mount and encapsulate too.

Easymount range gives your business extra capacity by allowing you to offer your customers a complete service that you previously had to outsource.





Fingertip control

Our exclusive patented multilingual control panel is simple and very easy-to-use.

It's available in English, French, German, Spanish and Italian.

Anyone can use it with the minimum of training, and it allows you to take complete control.

Whatever you need, you can achieve with absolute accuracy, quickly and easily.

Easymount gives you the flexibility and versatility you need.

Cost effectiveness

The versatility of Easymount laminators makes them incredibly cost-effective, meaning you can now truly offer a one-stop shop for print and finishing.

The range includes everything from entry-level models for those still finishing jobs by hand, to professional heavy-duty models that will cope with every application all day, everyday.

Lamination in depth, control in abundance

The range of Easymount laminators covers every job you need.

As they're designed in-house by our experts, we can make sure that everything about them is aimed at helping you to do that job more efficiently, more cost-effectively and more reliably.



A EM-1600SH Rear View



quickly and easily.



Get stuck in

You can apply more than just laminates – the Easymount range allows you to also lay down application tapes and vinyls, removing the need for squeegeeing by hand.

The feed table also lifts up, making it easier to load rolls of material, increasing effectiveness and minimising hassle.



Easymount by name, Easymount by nature

Designed for simple, high quality results in a matter of minutes with the minimum of fuss and training.

They're also extremely efficient – our patented pressure gauge handle ensures that you choose the correct setting every time

Anyone can quickly operate an Easymount.



Covering every angle When you are preparing a longer run, the optional take-up unit enables you to work with reel-to-reel lamination, saving time and making it more efficient, too.

" My Easymount has transformed my business. I can finish the job when I'm ready, without having to call on a specialist finisher. "

- large diameter rollers
- solid heavy duty construction
- magic eye safety feature

Series quick selector

Series qu	uick selector		M	odel suffix - e.g. EN	1-1600 DH		
Code	Maximum Film Width	Sign	Cold	Single Hot	Double Hot	SHW	
EMS-650	650mm/26-inches	s	-	-	-	-	
EM-880	880mm/35-inches	S	-	-	-	-	
EM-1200	1200mm/47-inches	-	-	SH	DH	-	
EM-1400	1400mm/55-inches	S	C	SH	-	-	
EM-1600	1600mm/63-inches	S	C	SH	-	SHW *	
EM-A1600	1600mm/63-inches	-	-	SH	-	-	
EM-1650	1650mm/65-inches	-	-	-	DH	-	
EM-2100	2100mm/83-inches	-	-	SH	-	-	

* Independent heated rollers. Model not suitable for encapsulation

	easymou	ent.	easymount.		Basymount.		easymount.	easym		nount.
EMS-650 S EM-880 S	EM-S1400/1 EM-S1400/1		▲ EM-1600 C		M-1200/1400 SH M-1600/2100 SH	ĒM	-A1600 SH	EM-1200/1650 DH	EM-16	00 SHW
Specifications	<u>Sign</u>	<u>Sign</u>	<u>Sign Cold</u>	<u>Sign Hot</u>	Cold		Single Hot	<u>Air Single Hot</u>	Double Hot	<u>SHW</u>
	650	880	1400/1600	1400/1600	1600	1200	/1400/1600/2100	1600	1200/1650	1600
Mechanical Speed (m/ft/min)	5/16	3/10	5/16	5/16	19		6/19	10/32	3.9/12	6/19
Max Width (mm)	650	880	1420/1620	1420/1620	1600	1200	0/1400/1600/2100	1600	1200/1650	1600
Max Width (inches)	26	35	55/63	55/63	63		47/55/63/83	63	47/65	63
Mounting Thickness (mm/inches)	15/1	15/1	25/1	25/1	25/1		25/1	30/1	25/1	25/1
Roller Diameter (mm)	65	70	130	130	130	112/112/130/130		130	112/130	130
Roller Diameter (inches)	3	3	5	5	5	4/4/5/5		5	4/5	5
Warm-up Time (mins)	-	-	-	10	-		10	10	15	15
Hot Roller Heater System	-	-	-	Infrared	-		Int. Infrared	Int. Infrared	Int. Infrared	Int. Infrared
Laminating Temperature Range (°C/°F) –	-	-	0-45/32-113	-		0-60/32-140	0-60/32-140	0-130 / 32-266	0-130 / 32-266
Control Panel	LED	LED	LED	LED	Digital		Digital	Digital	Digital	Digital
Pressure Adjustment	Manual	Manual	Manual	Manual	Manual/Gauge	I	Manual/Gauge	Pneumatic	Man./Gauge	Man./Gauge
Film Core (mm/inches)	77/3	77/3	77/3	77/3	77/3		77/3	77/3	77/3	77/3
Power Supply AC (V)	220/240	220/240	220/240	220/240	240		220/240	220/240	220/240	220/240
Power Supply Required (Amps)	13	13	13	13	13	13		13	32	32
Power Consumption (W)	50	50	38	1000/1200	50	970/1310/1500/1800		1500	3950/5150	5000
Dimensions - Width (mm/inches)	850/33	1100/43	1846/2046 56/81	1846/2046 56/81	2190 86	1790/1990/2190/2650 70/78/86/104		2190 86	1700/2170 67/85	1990 47
Dimensions - Depth x Height (mm/inches)	300x470 12x19	650x1250 26x49	550x1365 22x54	550x1365 22x54	1255 50	650x1255 26x50		650x1255 26x50	785x1255 31x50	650x1255 26x50
Gross Machine Weight (kg)	33	75	136/156	136/156	245	185/210/245/280		245	270	205
Gross Machine Weight (lbs)	73	165	300/344	300/344	540	4(08/463/540/617	540	365	451
Warranty	1 year	1 year	1 year	1 year	1 year		1 year	1 year	1 year	1 year
The rollers stay	A	ccessor	ies	Sign Sig	n Cold / Hot	Cold	Single Hot Ai	r Single Hot	Double Hot	SHW
completely level,	Ad	dditional Ma	andrels	-	•	•	•	•	•	•
no matter what		ike-up Unit		_	S	•	•	•	•	•
substrate you are		ust Cover		_	_	s	S	S	s	S
mounting onto. "	• Yes - No S Standard							-		